





Wifi-Texas.com Inc  
 815-A Brazos #326  
 Austin Tx 78701  
 512-479-0317  
 Skype: wifiqos

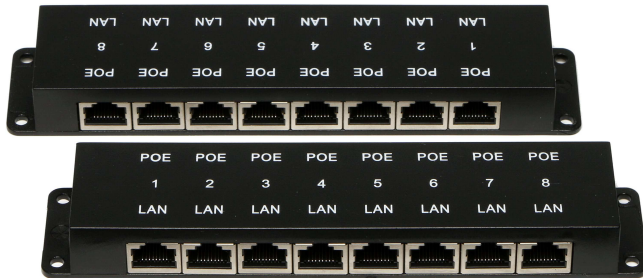

## WS-POE-8-ENC

8 port passive PoE injector

10/100 speed

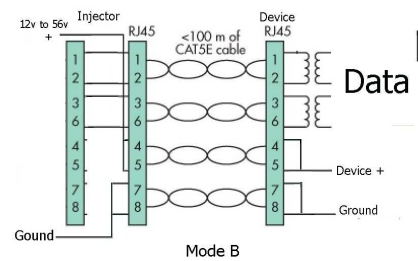

### Specifications

- 8 Port 10/100 Power over Ethernet Injector
  - 8 Shielded RJ-45 LAN
  - 8 Shielded RJ-45 LAN+POE
  - 2 pairs per socket for data at 10/100 speeds
  - 2 pairs per socket for power
  - always on PoE – no auto negotiation
  - mode B operation per 802.3af definition ( power on pins 45 and 78 )
- Wall mount Injector: 175 mm x 37mm x 25mm ( including 2x 10mm tabs )
- Same voltage to all ports – power shared as needed
- LED power display – green for 45 (+) and 78 (-) and Red for reverse polarity
- Use with any Ethernet switch – passes all management info transparently
- Ideal for IP Cameras, VOIP phone, WiFi Access Points
- Technical support from Austin
- Standard power connector - 2.1mm x 5.5mm
- operating / storage temperature range – 0 to 50 deg C
- relative humidity range – 5 to 90% non condensing
- the device is PELV per NFPA standard 79 – protected extra low voltage
- no cooling is required, no fans. Quiet operation



Power supply options

30, 60, 120 watts

Usage	Power Supply	Note
802.3af (passive)	48 volts 30, 60, 120 watts	IP Phones, PoE Cameras, 802.3af WiFi-Access Points
24 volt	24 volts 60 watts	Mikrotik, Ubiquiti, Open-Mesh OM2P
12v, PoE	48 volts 60 watts	Devices marked 12, PoE use 12 volts with a local supply and 48 volts when powered by Ethernet, like Hikvision, Swann, Dahua
USB, iPad, 5 volt and 12 volt non-PoE 10-12 watts	24 or 48 volts	use our 5v and 12 volt and USB splitters to deliver the exact voltage needed at up to 328 ft.